


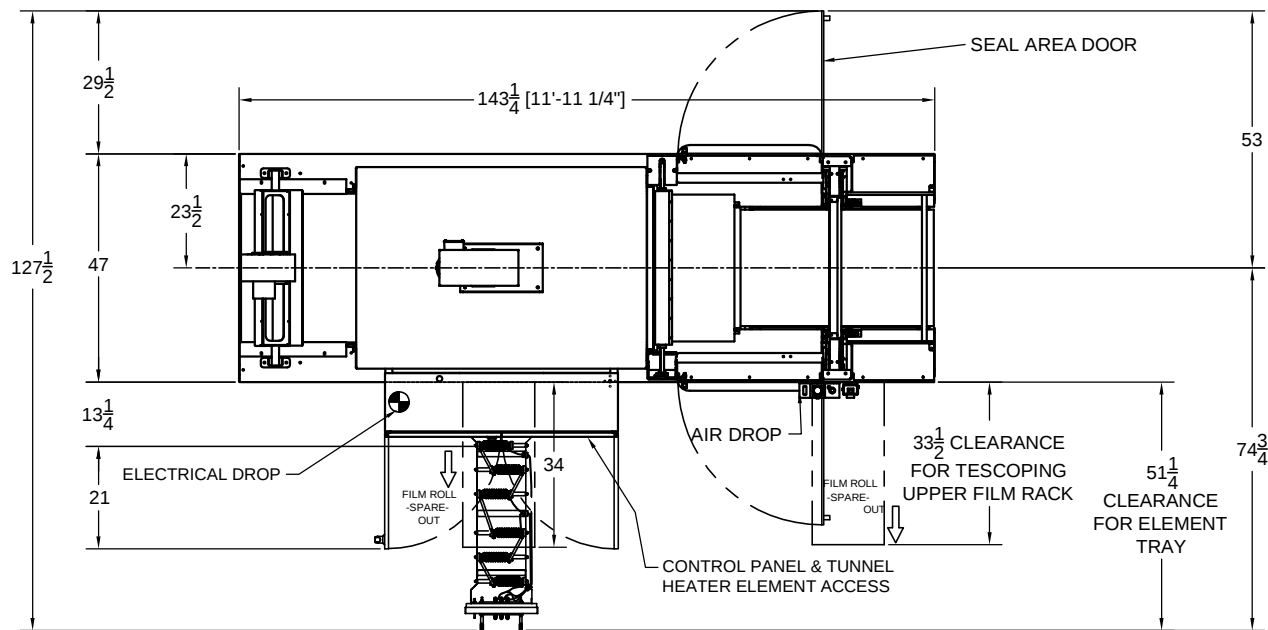

GENERAL NOTES

ELEC. SPECS: 460V-3PH-60 Hz -35 FLA, 50A MCB
5kA SCCR

IP Address Scheme: 10.255.255.xxx

Ambient temp less than 90 deg F


PLC Software: RSLogix 5500 V30

HMI Software: FactoryTalk V9.0

AIR SUPPLY: 80 PSI MIN 15 SCFM

FILM THK: TBD LPDE

COLOR: BLACK/SILVER

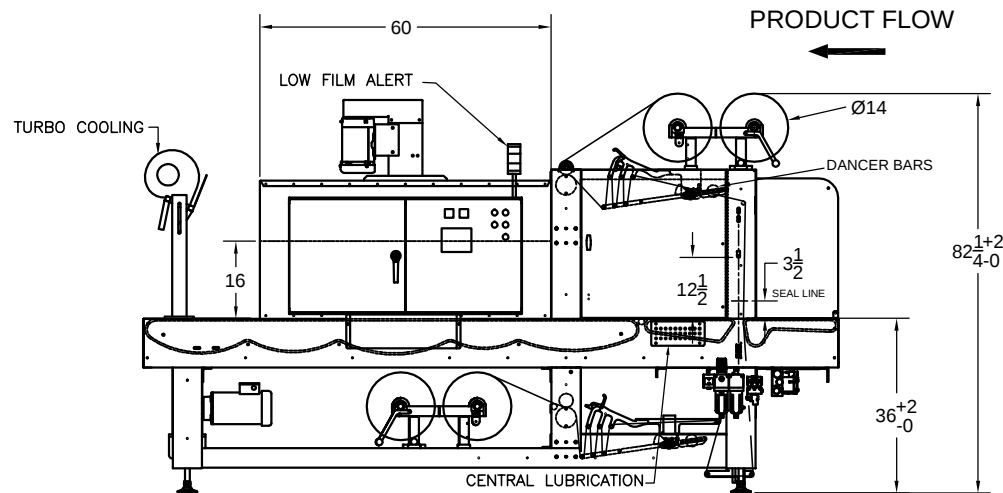

Approved By: _____

Signature: _____

Date: _____

RETURN TO:
ARPAC CORPORATION
Fax: 847-671-7006

Product In					Product Out				
Individual Product Description	Width	Length	Height	Rate Loose Product	Pattern (WxLxH)	Width	Length	Height	Rate Bundle/ Min
1 24 pack 8oz cans	13.00	8.00	6.00	10	1 x 1 x 1	13.00	8.00	6.00	10.00

ARPAC A DURAVANT COMPANY		9555 WEST IRVING PARK ROAD SCHILLER PARK, IL 60176					
DRAWN:	3-25-19	BY:	MRO	SCALE:	NONE	SIZE:	A
RELEASED:	3-25-19	FILENAME:	S16423	APPROVED BY:	MRO		
DESCRIPTION:							
25TW-28							
BLUE MARBLE						DRAWING NUMBER: S16423	